

# 600S/660SJ

## MID-SIZE TELESCOPIC BOOM LIFTS



- Rugged all-terrain telescopic boom lifts
- Powerful 4-wheel drive & oscillating axle
- Dual envelope for maximum lift capacities
- Excellent working range and 1.67m jib for maximum versatility
- Simple to operate and easy to maintain

 **snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# MID-SIZE TELESCOPIC BOOM LIFTS

# 600S/660SJ


DIMENSIONS	600S	660SJ
Max. working height	20.3m	22.0m
Max. platform height (A)	18.3m	20.0m
Max. working outreach	16.0m	17.7m
Platform size	2.44m x 0.91m	2.44m x 0.91m
Transport width	2.24m	2.24m
Overall width (B)	2.46m	2.46m
Transport length	9.2m	8.3m
Overall length (C)	9.2m	10.1m
Transport height	2.51m	2.9m
Stowed height (D)	2.51m	2.51m
Ground clearance	340mm	340mm

PERFORMANCE		
Platform capacity (SWL) unrestricted	272kg	272kg
Platform capacity (SWL) restricted	454kg	454kg
Max. drive height	18.3m	20.0m
Max. wind speed	12.5m/s	12.5m/s
Max. drive speed (stowed)	5.6km/h	5.6km/h
Max. drive speed (elevated)	0.96km/h	0.96km/h
Jib length	n/a	1.67m
Jib arc	n/a	135° (+70°/-65°)
Platform rotation	150°	150°
Turret rotation (continuous)	360°	360°
Raise/lower time	50/50 sec	50/50 sec
Tailswing	1.2m	1.2m
Gradeability	45%	45%
Inside turning radius	3.06m	3.06m
Outside turning radius	5.21m	5.21m
Tires	355/55 D625 foam filled lug	
Controls	Proportional drive, raise, slew, extend, jib & platform rotate	
Drive system	4-wheel drive	

POWER		
Power source	Deutz 55kW (74hp) turbo diesel - Stage V	
Auxillary power unit	12V DC	12V DC


WEIGHT		
Weight	11,176kg	12,982kg

## WORKING ENVELOPES

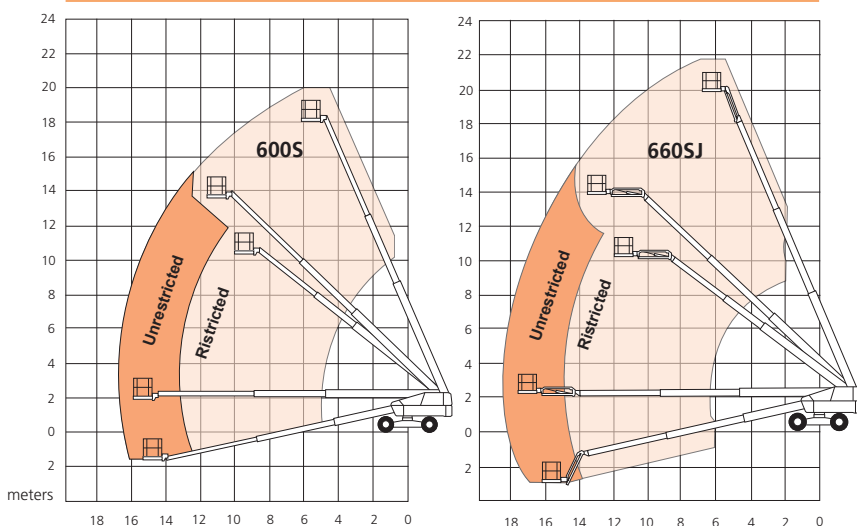

CE Specification  
© Snorkel 2021

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

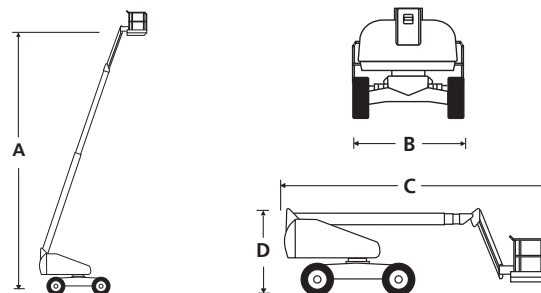

## STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- 1.67m 135° jib (660SJ)
- Oscillating axle (203mm of oscillation)
- Hydraulic platform rotation
- 4-wheel drive
- All proportional controls
- Swing-out engine tray
- Power line to platform
- Tilt alarm & cut-out
- DC emergency operation
- Hydraulic oil cooler
- Tri-entry platform
- Flashing amber light
- Hour meter & on-board diagnostic display
- 2 year parts & labour, 5 year structural warranty
- CE approved

## OPTIONS

- Special paint colours
- Airline to platform
- Non-marking tyres
- Dual fuel
- AC generator 110V/220V 2.5kW
- Aircraft package
- Deluxe aircraft package
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Light package
- Tow kit
- Glazier package
- 10kW generator package
- 10kW generator/welder package
- Environmental hydraulic oil
- Tool tray
- Pipe rack
- Snorkel OnSite™ telematics

**snorkel**

Vigo Centre, Birtley Road,  
Washington, Tyne & Wear,  
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales.emea@snorkellifts.com

www.snorkellifts.com